




## FAST RECOVERY RECTIFIER

### Features:

- . All diffused structure
- . High surge rating
- . Blocking capability up to 3000 volts
- . Soft recovery
- . Ceramic housing hermetic package
- . Pressure assembled device

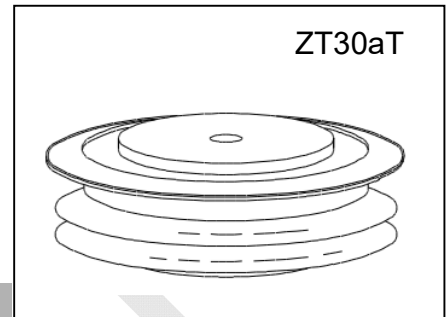

## ELECTRICAL CHARACTERISTICS AND RATINGS

### Reverse Blocking

Device Type	V <sub>RRM</sub> (1)	V <sub>RSM</sub> (1)
ZK300-20	2000	2200
ZK300-22	2200	2400
ZK300-24	2400	2600
ZK300-26	2600	2800
ZK300-28	2800	3000
ZK300-30	3000	3200

Notes:


All ratings are specified for T<sub>j</sub>=25 °C, unless otherwise stated

(1) All voltage ratings are specified for an applied 50Hz/60zHz sinusoidal waveform over the temperature range -40 to +125°C.

(2) 10 msec. max. pulse width

(3) Maximum value for T<sub>j</sub> = 125°C.

(4) See parameter definition below :

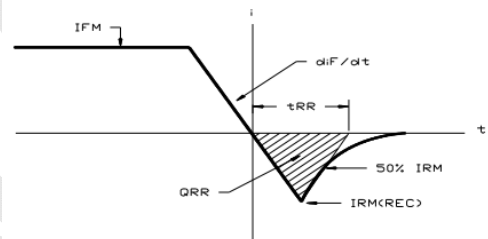

REVERSE RECOVERY CHARACTERISTIC

V<sub>RRM</sub> = Repetitive peak reverse voltage

V<sub>RSM</sub> = Non repetitive peak reverse voltage (2)

Repetitive peak reverse current	I <sub>RRM</sub>	10 mA 15 mA (3)
---------------------------------	------------------	--------------------

### Conducting - on state

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Average forward current	I <sub>F(AV)</sub>		300		A	Sinewave 180°, T <sub>c</sub> = 70°C
RMS forward current	I <sub>FRMS</sub>		471		A	
Peak one cycle surge (non repetitive) current	I <sub>FSM</sub>		4800		A	10 msec (50Hz), sinusoidal wave-shape, 180° conduction, T <sub>j</sub> = 125°C
I square t	I <sup>2</sup> t		115200		A <sup>2</sup> s	8.3 msec and 10.0 msec
Peak forward voltage	V <sub>FM</sub>		2.40		V	I <sub>FM</sub> = 1200A; Duty cycle ≤ 0.01%
Reverse Recovery Current (4)	I <sub>RM(REC)</sub>		*		A	I <sub>FM</sub> = 1000 A; dIF/dt = 10 A/μs; T <sub>j</sub> max
Reverse Recovery Charge (4)	Q <sub>rr</sub>		*		μC	I <sub>FM</sub> = 1000 A; dIF/dt = 10 A/μs; T <sub>j</sub> max
Reverse Recovery Time (4)	t <sub>rr</sub>		6		μs	I <sub>FM</sub> = 1000 A; dIF/dt = 10 A/μs; T <sub>j</sub> max

\* For guaranteed maximum values, contact factory

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Operating temperature	$T_j$	-40	+125		°C	
Storage temperature	$T_{stg}$	-40	+140		°C	
Thermal resistance - junction to case	$R_{\Theta(j-c)}$	0.045 (1)	0.055 (2)		°C/W	Double sided cooled (1) @ 2000 lb.; (2) @800 lb.
Thermal resistance - junction to case	$R_{\Theta(j-c)}$	0.090 (1)	0.110 (2)		°C/W	Single sided cooled (1) @ 2000 lb.; (2) @800 lb.
Thermal resistance - case to heatsink	$R_{\Theta(c-s)}$		0.010 0.020		°C/W	Double sided cooled * Single sided cooled *
Mounting force	P			10	kN	
Weight	W			80	g	

\* Mounting surfaces smooth, flat and greaseless

**CASE OUTLINE AND DIMENSIONS**

