




GENERAL PURPOSE HIGH POWER STANDARD RECTIFIER

Features:

- . All diffused structure
- . High surge rating
- . Blocking capability up to 6600 volts
- . Ceramic housing hermetic package
- . Pressure assembled device

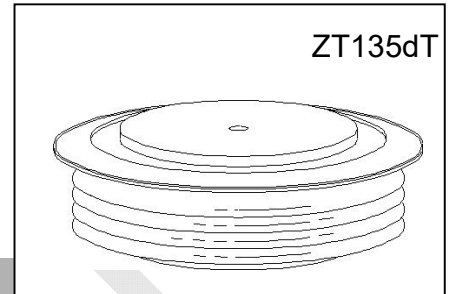

ELECTRICAL CHARACTERISTICS AND RATINGS

Reverse Blocking

| Device Type | V _{RRM} (1) | V _{RSM} (1) |
|-------------|----------------------|----------------------|
| ZP5000-58 | 5800 | 6000 |
| ZP5000-60 | 6000 | 6200 |
| ZP5000-62 | 6200 | 6400 |
| ZP5000-64 | 6400 | 6600 |
| ZP5000-66 | 6600 | 6800 |

Notes:


All ratings are specified for T_j=25 °C, unless otherwise stated

- (1) All voltage ratings are specified for an applied 50Hz/60Hz sinusoidal waveform over the temperature range 0 to +145 °C.
- (2) 10 msec. max. pulse width
- (3) Maximum value for T_j = 145 °C.
- (4) See parameter definition below :

V_{RRM} = Repetitive peak reverse voltage

V_{RSM} = Non repetitive peak reverse voltage (2)

| | | |
|---|------------------|-------------------|
| Repetitive peak reverse leakage current | I _{RRM} | 2 mA 30 mA (3) |
|---|------------------|-------------------|

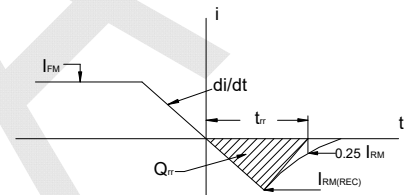

REVERSE RECOVERY CHARACTERISTIC

Conducting - on state

| Parameter | Symbol | Min. | Max. | Typ. | Units | Conditions |
|---|----------------------|------|-----------------------|------|------------------|---|
| Average forward current | I _{F(AV)} | | 5000 | | A | Sinewave 180°, T _c =85 °C |
| RMS forward current | I _{FRMS} | | 7850 | | A | Nominal value |
| Peak one cycle surge (non repetitive) current | I _{FSM} | | 56000 | | A | 10 msec (50Hz), sinusoidal wave-shape, 180° conduction, T _j = 145 °C |
| I square t | I ² t | | 1.6 × 10 ⁷ | | A ² s | 10 msec |
| Peak forward voltage | V _{FM} | | 1.50 | | V | I _{FM} = 5000A; T _j =25°C |
| Threshold voltage | V _{FO} | | 0.83 | | V | T _j =145°C, I = 0.5 π I _{F(AV)} to 1.5 π I _{F(AV)} |
| Slope resistance | r _F | | 0.09 | | mΩ | T _j =145°C, I = 0.5 π I _{F(AV)} to 1.5 π I _{F(AV)} |
| Reverse Recovery Current (4) | I _{RM(REC)} | | | | A | I _{FM} = 500 A; di/dt = -10 A/s; T _{jmax} |
| Reverse Recovery Charge (4) | Q _{rr} | | | | μC | I _{FM} = 500 A; di/dt = -10 A/s; T _{jmax} |
| Reverse Recovery Time (4) | t _{rr} | | | | μs | I _{FM} = 500 A; di/dt = -10 A/s; T _{jmax} |

| Parameter | Symbol | Min. | Max. | Typ. | Units | Conditions |
|---------------------------------------|-------------------|------|-------|------|-------|---------------------|
| Operating temperature | T_j | -40 | +145 | | °C | |
| Storage temperature | T_{stg} | -40 | +145 | | °C | |
| Thermal resistance - junction to case | $R_{\Theta(j-c)}$ | | 0.004 | | °C/W | Double sided cooled |
| Thermal resistance - case to heatsink | $R_{\Theta(c-s)}$ | | 0.001 | | °C/W | Double sided cooled |
| Mounting force | P | | | 120 | kN | |
| Weight | W | | | 3.60 | kg. | |

* Mounting surfaces smooth, flat and greaseless

CASE OUTLINE AND DIMENSIONS

