




\*\*\*\*\*

## GENERAL PURPOSE HIGH POWER STANDARD RECTIFIER

### Features:

- . All diffused structure
- . High surge rating
- . Blocking capability up to 6600 volts
- . Ceramic housing hermetic package
- . Pressure assembled device

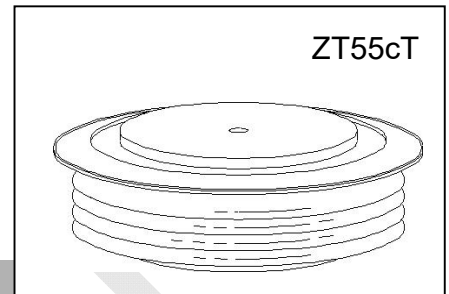

## ELECTRICAL CHARACTERISTICS AND RATINGS

### Reverse Blocking

Device Type	V <sub>RRM</sub> (1)	V <sub>RSM</sub> (1)
ZP900-58	5800	6000
ZP900-60	6000	6200
ZP900-62	6200	6400
ZP900-64	6400	6600
ZP900-66	6600	6800

#### Notes:


All ratings are specified for T<sub>j</sub>=25 °C, unless otherwise stated

- (1) All voltage ratings are specified for an applied 50Hz/60zHz sinusoidal waveform over the temperature range 0 to +145 °C.
- (2) 10 msec. max. pulse width
- (3) Maximum value for T<sub>j</sub> = 145 °C.
- (4) See parameter definition below :

V<sub>RRM</sub> = Repetitive peak reverse voltage

V<sub>RSM</sub> = Non repetitive peak reverse voltage (2)

Repetitive peak reverse leakage current	I <sub>RRM</sub>	2 mA 30 mA (3)
---	------------------	-------------------

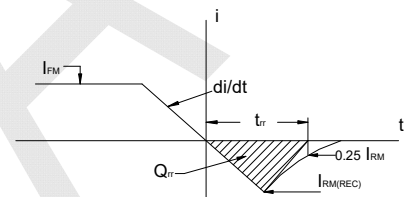

REVERSE RECOVERY CHARACTERISTIC

### Conducting - on state

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Average forward current	I <sub>F(AV)</sub>		900		A	Sinewave 180°, T <sub>c</sub> =85 °C
RMS forward current	I <sub>FRMS</sub>		1413		A	Nominal value
Peak one cycle surge (non repetitive) current	I <sub>FSM</sub>		16000		A	10 msec (50Hz), sinusoidal wave-shape, 180° conduction, T <sub>j</sub> = 145 °C
I square t	I <sup>2</sup> t		1.3 × 10 <sup>6</sup>		A <sup>2</sup> s	10 msec
Peak forward voltage	V <sub>FM</sub>		1.50		V	I <sub>FM</sub> = 1000A; T <sub>j</sub> =25 °C
Threshold voltage	V <sub>FO</sub>		1.05		V	T <sub>j</sub> =145 °C, I = 0.5 π I <sub>F(AV)</sub> to 1.5 π I <sub>F(AV)</sub>
Slope resistance	r <sub>F</sub>		0.35		mΩ	T <sub>j</sub> =145 °C, I = 0.5 π I <sub>F(AV)</sub> to 1.5 π I <sub>F(AV)</sub>
Reverse Recovery Current (4)	I <sub>RM(REC)</sub>				A	I <sub>FM</sub> = 500 A; di/dt = -10 A/s; T <sub>jmax</sub>
Reverse Recovery Charge (4)	Q <sub>rr</sub>				μC	I <sub>FM</sub> = 500 A; di/dt = -10 A/s; T <sub>jmax</sub>
Reverse Recovery Time (4)	t <sub>rr</sub>				μs	I <sub>FM</sub> = 500 A; di/dt = -10 A/s; T <sub>jmax</sub>

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Operating temperature	$T_j$	-40	+145		°C	
Storage temperature	$T_{stg}$	-40	+145		°C	
Thermal resistance - junction to case	$R_{\Theta(j-c)}$		0.022		°C/W	Double sided cooled
Thermal resistance - case to heatsink	$R_{\Theta(c-s)}$		0.005		°C/W	Double sided cooled
Mounting force	P			20	kN	
Weight	W			0.60	kg.	

\* Mounting surfaces smooth, flat and greaseless

**CASE OUTLINE AND DIMENSIONS**

