

**R A E**

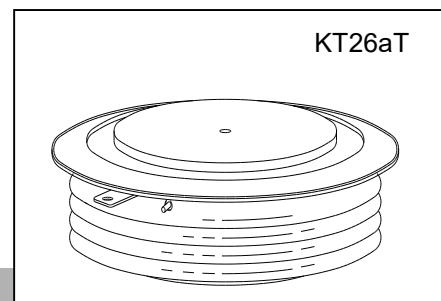
Jiangsu Runau Electronics Manufacturing Co.,Ltd

**YC380-Power Thyristor**500 - 1600 V<sub>DRM</sub>

\*\*\*\*\*

**HIGH POWER THYRISTOR FOR PHASE CONTROL APPLICATIONS****Features:**

- . All Diffused Structure
- . Interdigitated Amplifying Gate Configuration
- . Blocking capability up to 1600 volts
- . Guaranteed Maximum Turn-Off Time
- . High dV/dt Capability
- . Pressure Assembled Device

**ELECTRICAL CHARACTERISTICS AND RATINGS****Blocking - Off State**

Device Type	V <sub>RRM</sub> (1)	V <sub>DRM</sub> (1)	V <sub>RSM</sub> (1)
YC380E	500	500	600
YC380M	600	600	720
YC380N	800	800	960
YC380P	1000	1000	1150
YC380PB	1200	1200	1300
YC380PD	1400	1400	1500
YC380PM	1600	1600	1700

V<sub>RRM</sub> = Repetitive peak reverse voltageV<sub>DRM</sub> = Repetitive peak off state voltageV<sub>RSM</sub> = Non repetitive peak reverse voltage (2)

Repetitive peak reverse leakage and off state leakage	I <sub>RRM</sub> / I <sub>DRM</sub>	5 mA 20mA (3)
Critical rate of voltage rise	dV/dt (4)	200 V/μsec

**Notes:**All ratings are specified for T<sub>j</sub>=25 °C unless otherwise stated.

(1) All voltage ratings are specified for an applied 50Hz/60Hz sinusoidal waveform over the temperature range -40 to +125 °C.

(2) 10 msec. max. pulse width

(3) Maximum value for T<sub>j</sub> = 125 °C.(4) Minimum value for linear and exponential waveshape to 80% rated V<sub>DRM</sub>. Gate open. T<sub>j</sub> = 125 °C.

(5) Non-repetitive value.

(6) The value of di/dt is established in accordance with EIA/NIMA Standard RS-397, Section 5-2-2-6. The value defined would be in addition to that obtained from a snubber circuit, comprising a 0.2 μF capacitor and 20 ohms resistance in parallel with the thristor under test.

**Conducting - on state**

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Average value of on-state current	I <sub>T(AV)</sub>		250		A	Sinewave, 180° conduction, T <sub>c</sub> =65°C
RMS value of on-state current	I <sub>TRMS</sub>		400		A	Nominal value
Peak one cycle surge (non repetitive) current	I <sub>TSM</sub>		3500		A	8.3 msec (60Hz), sinusoidal wave- shape, 180° conduction, T <sub>j</sub> = 125 °C
			3200		A	10.0 msec (50Hz), sinusoidal wave- shape, 180° conduction, T <sub>j</sub> = 125 °C
I square t	I <sup>2</sup> t		50000		A <sup>2</sup> s	8.3 msec
Latching current	I <sub>L</sub>		800		mA	V <sub>D</sub> = 24 V; R <sub>L</sub> = 12 ohms
Holding current	I <sub>H</sub>		400		mA	V <sub>D</sub> = 24 V; I = 2.5 A
Peak on-state voltage	V <sub>TM</sub>		2.85		V	I <sub>TM</sub> = 1500 A;
Critical rate of rise of on-state current (5, 6)	di/dt		400		A/μs	Switching from V <sub>DRM</sub> ≤ 1000 V, non-repetitive
Critical rate of rise of on-state current (6)	di/dt		150		A/μs	Switching from V <sub>DRM</sub> ≤ 1000 V

### Gating

Parameter	Symbol	Min	Max	Typ	Units	Conditions
Peak gate power dissipation	P <sub>GM</sub>		200		W	t <sub>p</sub> = 40 us
Average gate power dissipation	P <sub>G(AV)</sub>		5		W	
Peak gate current	I <sub>GM</sub>		10		A	
Gate current required to trigger all units	I <sub>GT</sub>		300 200 125		mA	V <sub>D</sub> = 6 V; R <sub>L</sub> = 3 ohms; T <sub>j</sub> = -40 °C V <sub>D</sub> = 6 V; R <sub>L</sub> = 3 ohms; T <sub>j</sub> = +25 °C V <sub>D</sub> = 6 V; R <sub>L</sub> = 3 ohms; T <sub>j</sub> = +125 °C
Gate voltage required to trigger all units	V <sub>GT</sub>	0.30	5 3		V	V <sub>D</sub> = 6 V; R <sub>L</sub> = 3 ohms; T <sub>j</sub> = -40 °C V <sub>D</sub> = 6 V; R <sub>L</sub> = 3 ohms; T <sub>j</sub> = 0-125 °C V <sub>D</sub> = Rated V <sub>DRM</sub> ; R <sub>L</sub> = 1000 ohms; T <sub>j</sub> = + 125 °C
Peak negative voltage	V <sub>GRM</sub>		5		V	

### Dynamic

Parameter	Symbol	Min	Max	Typ	Units	Conditions
Delay time	t <sub>d</sub>		1.5	0.7	μs	I <sub>TM</sub> = 50 A; V <sub>D</sub> = 67% V <sub>DRM</sub> Gate pulse: V <sub>G</sub> = 30 V; R <sub>G</sub> = 10 ohms; t <sub>r</sub> = 0.1 μs; t <sub>p</sub> = 20 μs
Turn-off time (with V <sub>R</sub> = -5 V)	t <sub>q</sub>		200	100	μs	I <sub>TM</sub> > 1000 A; di/dt = 25 A/μs; V <sub>R</sub> ≥ -5 V; Re-applied dV/dt = 20V/μs linear to 67% V <sub>DRM</sub> ; T <sub>j</sub> = 125 °C; Duty cycle ≥ 0.01%
Reverse recovery charge	I <sub>rr</sub>				μC	I <sub>TM</sub> > 1000 A; di/dt = 25 A/μs; V <sub>R</sub> ≥ -50 V; T <sub>j</sub> = 125 °C

### THERMAL AND MECHANICAL CHARACTERISTICS AND RATINGS

Parameter	Symbol	Min	Max	Typ	Units	Conditions
Operating temperature	T <sub>j</sub>	-40	+125		°C	
Storage temperature	T <sub>stg</sub>	-40	+140		°C	
Thermal resistance - junction to case	R <sub>Θ(j-c)</sub>		0.11 0.22		°C/W	Double sided cooled Single sided cooled
Thermal resistamce - case to sink	R <sub>Θ(c-s)</sub>		0.030 0.060		°C/W	Double sided cooled * Single sided cooled
Mounting force	P	720 3.2	880 3.92		lb. kN	
Weight	W			2.2 56	oz g	

\* Mounting surfaces smooth, flat and greased

