



R U N A U

Jiangsu Runau Electronics Manufacturing Co.,Ltd

ZP5800-Rectifier Diode


2500 - 3500 V_{RRM}

GENERAL PURPOSE HIGH POWER STANDARD RECTIFIER

Features:

- . All Diffused Structure
- . High Surge rating
- . Blocking capability up to 3500 volts
- . Ceramic Housing Hermetic Package
- . Pressure Assembled Device

ZT110cT

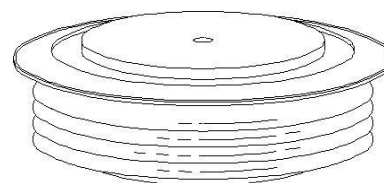

ELECTRICAL CHARACTERISTICS AND RATINGS

Reverse Blocking

Device Type	V _{RRM} (1)	V _{RSM} (1)
ZP5800-25	2500	2700
ZP5800-26	2600	2800
ZP5800-28	2800	3000
ZP5800-30	3000	3200
ZP5800-32	3200	3400
ZP5800-35	3500	3700

Notes:


All ratings are specified for T_j=25 °C unless otherwise stated.

(1) All voltage ratings are specified for an applied 50Hz/60Hz sinusoidal waveform over the temperature range 0 to +160°C.

(2) 10 msec. max. pulse width

(3) Maximum value for T_j = 160°C.

(4) See parameter definition below:

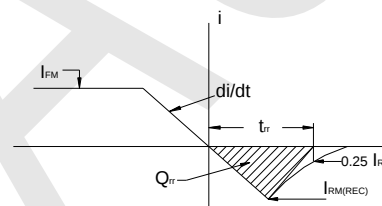

REVERSE RECOVERY CHARACTERISTIC

V_{RRM} = Repetitive peak reverse voltage

V_{RSM} = Non repetitive peak reverse voltage (2)

Repetitive peak reverse leakage	I _{RRM}	5 mA 200 mA (3)
---------------------------------	------------------	--------------------

Conducting - on state

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Average forward current	I _{F(AV)}		5800		A	Sinewave, 180°, T _c = 90°C
RMS forward current	I _{FRMS}		9106		A	Nominal value
Peak one cycle surge (non repetitive) current	I _{FSM}		81200		A	10 msec (50Hz), sinusoidal wave-shape, 180° conduction, T _j = 160 °C
I square t	I ² t		3.3 × 10 ⁷		A ² s	10 msec
Peak forward voltage	V _{FM}		1.20		V	I _{FM} = 5000A; T _j = 25°C
Threshold voltage	V _{FO}		0.78		V	T _j = 160°C, I = 0.5π I _{F(AV)} to 1.5π I _{F(AV)}
Slope resistance	r _F		0.08		mΩ	T _j = 160°C, I = 0.5π I _{F(AV)} to 1.5π I _{F(AV)}
Reverse Recovery Current (4)	I _{RM(REC)}				A	I _{FM} = 500 A; di/dt = -10 A/s; T _{jmax}
Reverse Recovery Charge (4)	Q _{rr}			7000	μC	I _{FM} = 500 A; di/dt = -10 A/s; T _{jmax}
Reverse Recovery Time (4)	t _{rr}				μs	I _{FM} = 500 A; di/dt = -10 A/s; T _{jmax}

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Operating temperature	T_j	-40	+160		$^{\circ}\text{C}$	
Storage temperature	T_{stg}	-40	+160		$^{\circ}\text{C}$	
Thermal resistance - junction to case	$R_{\Theta(j-c)}$		0.006		$^{\circ}\text{C/W}$	Double sided cooled
Thermal resistance - case to heatsink	$R_{\Theta(c-s)}$		0.0015		$^{\circ}\text{C/W}$	Double sided cooled
Mounting force	P	65	85	80	kN	
Weight	W			1.9	kg.	

* Mounting surfaces smooth, flat and greaseless

CASE OUTLINE AND DIMENSIONS

