



WELDING DIODE

Features:

- . All diffused structure
- . High current density
- . Very low forward voltage drop
- . Ceramic housing hermetic package
- . Ultra-low thermal resistance

ELECTRICAL CHARACTERISTICS AND RATINGS

Reverse Blocking

Device Type	V_{RRM} (1)	V_{RSM} (1)
ZW10500-02	200	300
ZW10500-04	400	450


 V_{RRM} = Repetitive peak reverse voltage V_{RSM} = Non repetitive peak reverse voltage (2)

Repetitive peak reverse leakage current	I_{RRM}	15 mA 75 mA (3)
---	-----------	--------------------

Notes:

All ratings are specified for $T_j = 25^\circ\text{C}$, unless otherwise stated

- (1) Sine half wave, $f=50\text{Hz}$, $T_j = -40$ to $+180^\circ\text{C}$.
- (2) Sine half wave, Pulse width 10 msec. $T_j = -40$ to $+180^\circ\text{C}$.
- (3) Maximum value for $T_j = 180^\circ\text{C}$.
- (4) See parameter definition below :

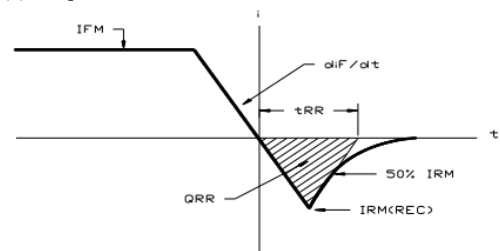

REVERSE RECOVERY CHARACTERISTIC

Conducting - on state

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Average forward current	$I_{F(AV)}$		10500		A	Sinewave 180° , $T_c = 85^\circ\text{C}$
RMS forward current	I_{FRMS}		16485		A	
Peak one cycle surge (non repetitive) current	I_{FSM}		70000		A	Pulse width 10 msec, sinusoidal wave-shape, $V_R=0V$, $T_j = 180^\circ\text{C}$
I square t	I^2t		24000		KA^2s	Pulse width 10 msec, sinusoidal wave-shape, $T_j = 180^\circ\text{C}$
Peak forward voltage	V_{FM}		1.05		V	$I_{FM} = 5000A$; 25°C
Threshold voltage	V_{TO}		0.8		V	$T_j = 180^\circ\text{C}$
Slope resistance	r_T		0.026		$\text{m}\Omega$	$T_j = 180^\circ\text{C}$
Reverse Recovery Current (4)	$I_{RM(REC)}$				A	$di/dt = -25A/\mu\text{s}$, $I_{FM} = 1000A$, $V_R = 50V$
Reverse Recovery Charge (4)	Q_{rr}		600		μC	$di/dt = -25A/\mu\text{s}$, $I_{FM} = 1000A$, $V_R = 50V$
Reverse Recovery Time (4)	t_{rr}				μs	$di/dt = -25A/\mu\text{s}$, $I_{FM} = 1000A$, $V_R = 50V$

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Operating temperature	T_j	-40	+180		°C	
Storage temperature	T_{stg}	-40	+180		°C	
Thermal resistance - junction to case	$R_{\Theta(j-c)}$		0.005		°C/W	Double sided cooled
Thermal resistance - case to heatsink	$R_{\Theta(j-c)}$		0.0025		°C/W	Double sided cooled
Creepage distance	D_s		2		mm	
Air breakdown distance	D_a		2		mm	
Mounting force	F			32	kN	
Weight	W			108	g	

* Mounting surfaces smooth, flat and greaseless

CASE OUTLINE AND DIMENSIONS

