




STANDARD DIODE WITH HIGH JUNCTION TEMPERATURE

Features:

- . All diffused structure
- . Blocking capability up to 2400 volts
- . Soft reverse recovery
- . Rugged ceramic hermetic package
- . Pressure assembled device

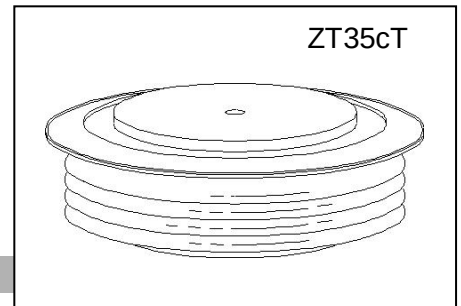

ELECTRICAL CHARACTERISTICS AND RATINGS

Reverse Blocking

Device Type	V _{RRM} (1)	V _{RSM} (1)
YA540L	2000	2000
YA540LB	2200	2200
YA540LD	2400	2400

V_{RRM} = Repetitive peak reverse voltageV_{RSM} = Non repetitive peak reverse voltage (2)

Repetitive peak reverse leakage current	I _{RRM}	10 mA 50 mA (3)
---	------------------	--------------------

Notes:


All ratings are specified for T_j=25 °C, unless otherwise stated

(1) All voltage ratings are specified for an applied 50Hz/60Hz sinusoidal waveform over the temperature range -40 to +185°C.

(2) 10 msec. max. pulse width

(3) Maximum value for T_j = 185°C.

(4) See parameter definition below :

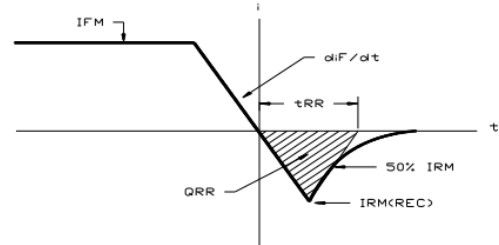

REVERSE RECOVERY CHARACTERISTIC

Conducting - on state

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Average forward current	I _{F(AV)}		1000		A	Sinewave 180°, T _c = 95°C
RMS forward current	I _{FRMS}		1570		A	Nominal value
Peak one cycle surge (non repetitive) current	I _{FSM}		12000 11500		A	8.3 msec (60Hz), sinusoidal wave-shape, 180° conduction, T _j = 160 °C 10 msec (50Hz), sinusoidal wave-shape, 180° conduction, T _j = 160°C
I square t	I ² t		6.6x10 ⁵		A ² s	8.3 msec and 10.0 msec
Peak forward voltage	V _{FM}		1.08		V	I _{FM} = 1000A; Duty cycle ≤0.01%; T _j = 160°C
Reverse Recovery Current (4)	I _{RM(REC)}		*		A	I _{FM} = 1000 A; dI _F /dt = 25 A/μs; T _j = 125°C
Reverse Recovery Charge (4)	Q _{rr}		*		μC	I _{FM} = 1000 A; dI _F /dt = 25 A/s; T _{jmax}
Reverse Recovery Time (4)	t _{rr}		*		μs	

* For guaranteed maximum values, contact factory

* Mounting surfaces smooth, flat and greaseless

Technical drawing of a mechanical part, showing front and top views with dimensions.

Front View (Top):

- Overall diameter: $\Phi 47$
- Inner diameter of the central hole: $\Phi 31.8$
- Height of the central hole: 1.0 min
- Height of the main body: 26 ± 1

Top View (Bottom):

- Overall diameter: $\Phi 51_{\text{max}}$
- Inner diameter of the central hole: $\Phi 31.8$
- Feature: $2 - \Phi 3.5 \times 3.0$ (Two holes, each with a diameter of $\Phi 3.5$ and a depth of 3.0)